


# JLDQ.29M

## SINGLE DRIVE

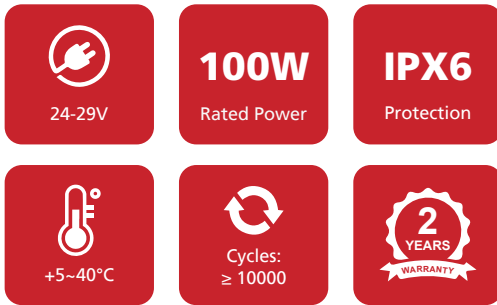

### Standard configurations:

Duty cycle	Max 1min on / 8min off
Installation size	165+stroke (20-250mm)
Max load	8000N
Certification standard	IEC60601-1
Noise without loading	≤50dB(A)@500mm
Installation mode	0° or 90°
Feedback	Hall sensor and reed switch
Optional	Manual mechanical release function (Patient shifter)

### Drawings:

